


SPARK RES'T. UNIT

- A $6 \frac{13}{16}$ "
- B 2 "
- C $6 \frac{9}{16}$ "
- D $6 \frac{9}{16}$ "
- E $3 \frac{3}{4}$ "
- F 5 "
- **G $15/16$ "
- H 1 "
- *I $4 \frac{11}{16}$ "
- *J $3 \frac{3}{4}$ "
- K $7 \frac{1}{4}$ "
- L $6 \frac{1}{2}$ "
- M $2 \frac{1}{2}$ "
- N $1 \frac{3}{8}$ "
- O $2 \frac{15}{16}$ "
- P $1 \frac{3}{32}$ "

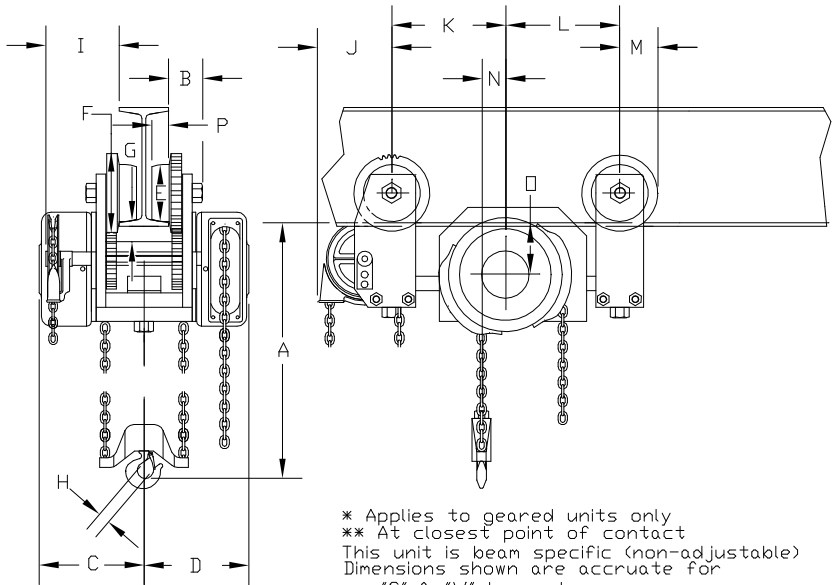

* Applies to geared units only
 ** At closest point of contact
 This unit is beam specific (non-adjustable)
 Dimensions shown are accurate for
 "S" & "W" beam shapes

THIS DRAWING SUPPLIED FOR DIMENSIONAL PURPOSES ONLY
 VISUAL DETAILS MAY VARY SLIGHTLY FROM UNIT SUPPLIED
 HOWEVER DIMENSIONS SHOWN APPLY

1/2 TON SWIVEL TRUCK
 LOW HEADROOM

CHESTER HOIST
 LISBON, OHIO

DR. RLB	TR.	CK.	AP.
SCALE NONE		DATE 10/1/07	

REF. DWG. NO.

Dwg. No. CN221

MK.

REVISIONS

CK-DATE